

RX321 Stereo 2-Way / Mono 3-Way Crossover


The RX321 is a breakthrough in electronic crossover performance. The separate crossover controls, and 24 dB/Octave slope provide a level of performance unattainable before. The frequency controls utilize special nine-wiper potentiometers for increased reliability and accuracy. The subwoofer filter, CD horn equalization and High Frequency output Phase Reversal round out the RX321 feature list.

FEATURES:

- Separate control of High-pass and Low-pass filter frequencies
- Right and Left mixed subwoofer output
- Overload LEDs for clipping indication
- Stereo 2-Way, Mono 3-Way operation
- Phase Reverse switch on all High Frequency outputs
- Constant Dispersion (CD) Horn equalization
- 20 Hz subsonic filter
- 24 dB / Octave High-pass and Low-pass filters - Not state-variable
- XLR and 1/4" inputs and outputs

SPECIFICATIONS

Input Impedance:	10kΩ XLR or 1/4" bal.
Max Input Level:	+23 dB bal.
Max Output Level:	+23 dB bal. XLR
Output Impedance:	50 Ω
Max Gain:	20 dB
Filter Slope:	24dB/Oct.
Frequency Controls:	100Hz - 5kHz
Subwoofer Xover:	80Hz
Rumble Filter:	20Hz
S/N Ratio:	106dB
THD:	<.003%
IMD (SMPTE):	<.003%
CMRR:	52dB
Size:	1.75" x 6" x 19" (4.5cm x 15cm x 48.3cm)

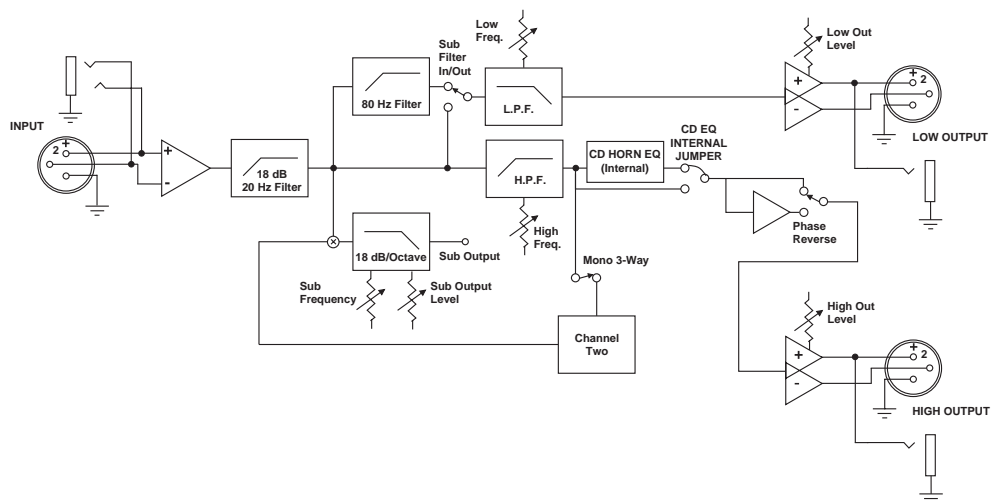

ROLLS Coporation
5143 South Main Street, Salt Lake City, UT, 84107
(801) 263-9053 FAX (801) 263-9068
rolls@rolls.com • www.rolls.com