

RM203x STEREO LINE MIXER


The new ROLLS RM203x Stereo Line Mixer is a line-level mixer with nine channels of stereo 1/4" inputs, a single XLR Mic Input, a Tape input and output provided via stereo RCA jacks, and a mono auxiliary send and stereo returns. Each channel has a signal Level control, a right/left Balance control, an Auxiliary level control, and a Clip LED indicator. The master section has a Tape Input level control, an Auxiliary Return level control, and a Master Output volume control. The RM203 also has a Headphone Output with level control provided by the Master level controls.

FEATURES

- One XLR Mic Input with 12VDC Phantom Power
- 9 Stereo Inputs
- RCA Tape Inputs and Outputs
- Balanced 1/4" TRS Outputs
- Mono Auxiliary Send
- Stereo Auxiliary Returns
- Clip Indication on Each Channel
- Headphone Output
- Master Output Level Control
- Balance Control for Each Channel
- Auxiliary Send Control for Each Channel
- External Power Supply (included) for Quiet Operation

SPECIFICATIONS

Input Impedance:	10 k Ω unbal.
Output Impedance:	50 Ω bal
Max Input Level:	+18 dBV
Phase Shift:	< 10 deg. 20 Hz - 20 kHz
Connectors:	1/4" and RCA
Max Gain:	26 dB Line 26 dB Aux
S/N Ratio:	>90 dB
THD	< .003%
IMD (SMPTE)	< .003%
Power	120 VAC 50-60 Hz, 15 W
Weight:	7 lbs (3KG)
Size:	19" x 1.75" x 6.5" (48cm x 4.5cm x 17cm)

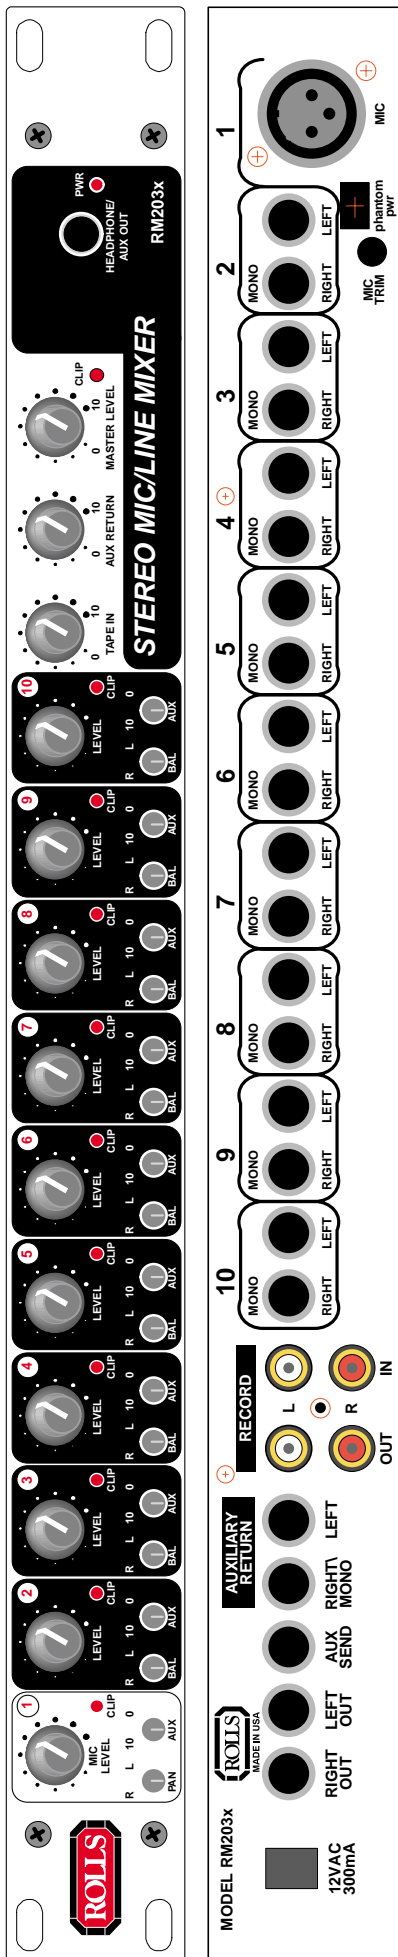

ROLLS Coporation 8/97
 5143 South Main Street, Salt Lake City, UT, 84107
 (801) 263-9053 FAX (801) 263-9068
www.rolls.com